

TW23M - TW20M

Z = 2

Z = 4



Finger joint cutterheads Teste per giunzioni


Tools for working long grain on short workpieces.

Please note: two different types of knives are fitted on the cutterheads: **CW20MA** and **CW20MB**. The tool is supplied with a spacing ring S= 2,5 mm so that a perfect joint can be obtained and the initial zero-point programming maintained. The max. thickness possible is 62,5 mm. Light alloy body (Aluminum alloy). For cleaning do not use products containing caustic soda.

Utensili per la lavorazione lungo vena di pezzi corti.

Attenzione: sulle teste sono montati due tipi di coltelli diversi: **CW20MA** e **CW20MB**. Vengono forniti in dotazione i coltelli ed un anello distanziale S= 2,5mm per ottenere una perfetta giunzione mantenendo la programmazione iniziale inalterata. Lo spessore massimo ottenibile è di 62,5 mm. Corpo in lega leggera (Lega di alluminio). Per la pulizia non utilizzare prodotti contenenti soda caustica.

D mm	B mm	d* mm	Z	R	Max RPM 1/min.	Code Codice	SAP SAP
140	70	30	4		9.600	TW20M BA3	F03FC22727
140	70	35 (50)	4		9.600	TW20M BF3	F03FC20564
140	70	30	2		9.600	TW23M BE3	F03FC24404
140	70	32	2		9.600	TW23M BG3	F03F668303
140	70	35 (50)	2		9.600	TW23M BF3	F03FC20567

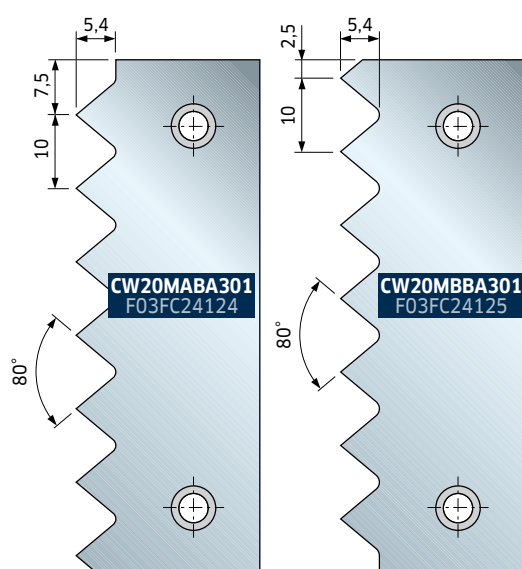

Spare parts Parti di ricambio	Dimensions Dimensioni mm	Code Codice	SAP SAP
Knife / Coltello	70 x 25 x 3	CW20MABA301	F03FC24124
Knife / Coltello	70 x 25 x 3	CW20MBBA301	F03FC24125
Wedge / Cuneo	68 x 19 x 8	CN11M C660A	F03FC01354
Screw / Vite	M10 x 18	VT03M CC9	F03FA04438
Screw / Vite	M5 x 8	VT05M AA9	F03FA04444
Positioning plate / Piastrina di riscontro	22 x 1,7 x 19	VT18M GB9	F03FA04489
Allen key / Chiave	5 x 110	CB03M EA9	F03FA00169
Spacer / Anello distanziale	50 x 2,5 x 30	AN20M AI9	F03FC00552
Spacer / Anello distanziale	55 x 2,5 x 35	AN20M BI9	F03FC00553
Spacer / Anello distanziale	52 x 2,5 x 32	AN20M EI9	F03FC24411

TW20M BA3
TW23M BE3
TW20M BF3
TW23M BF3
TW23M BG3

