



LU3A

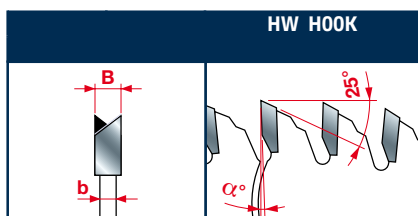

Kenmerken van tanden - Tooth features

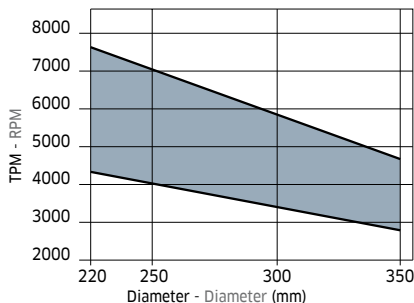

Minimaal en maximaal toerental op basis van blad-diameter.
Minimum and maximum RPM based on the blade diameter.

Werken met spindel onder het werkvlak Working with spindle under the working plane



HW - Zaagbladen om panelen te zagen met melamine of laminaat

HW - Saw blades to cut bilaminated panels

Uitermate geschikt voor het zagen van MDF of spaanderplaat met aan beide zijden laminaat of melamine met perfecte afwerking aan beide zijden zonder gebruik te maken van een ritser.

Machines: Verticale paneelzagen, platenzaagmachines, draagbare machines.

Kenmerken: ATB-tand van 38°, met variabele snijhoek volgens de diameter.

Materiaal: Bilaminaat panelen met extreem fijne coatings, gefineerde panelen.

To size bilaminated panels, with perfect finishing on both sides without the employment of the scoring saw blade.

Machines: Circular vertical saws, panel-sizing machines, portable machines.

Features: ATB 38° tooth, with variable cutting angle according to the diameter.

Material: Bilaminated panels with extremely fine coatings, veneered panels.

FT01: 2/7/42 + 2/9/46,4 + 2/10/60

FT02: 2/9/46,4 + 2/10/60

	D mm	B mm	b mm	d mm	Z	α	NL NL	Code Code	SAP SAP
220	3,2	2,2	30	64	-5°	2/7/42		LU3A 0100	F03FS05059
250	3,2	2,2	30	80	-2°	FT01		LU3A 0200	F03FS05061
300	3,2	2,2	25,4	96	2°			LU3A 0600	F03FS05807
300	3,2	2,2	30	96	2°	FT01		LU3A 0300	F03FS05064
350	3,5	2,5	30	108	5°	FT02		LU3A 0400	F03FS05066



	Ultim Ultimate	Hoog High	Goed Good
Houtcomposieten Wood composites	●		
Laminaten Laminates	●		

